


# BUFFALO BAG

HANDCRAFTED LEATHER



## Mounting instructions for saddlebags to Dyna-Glide bikes

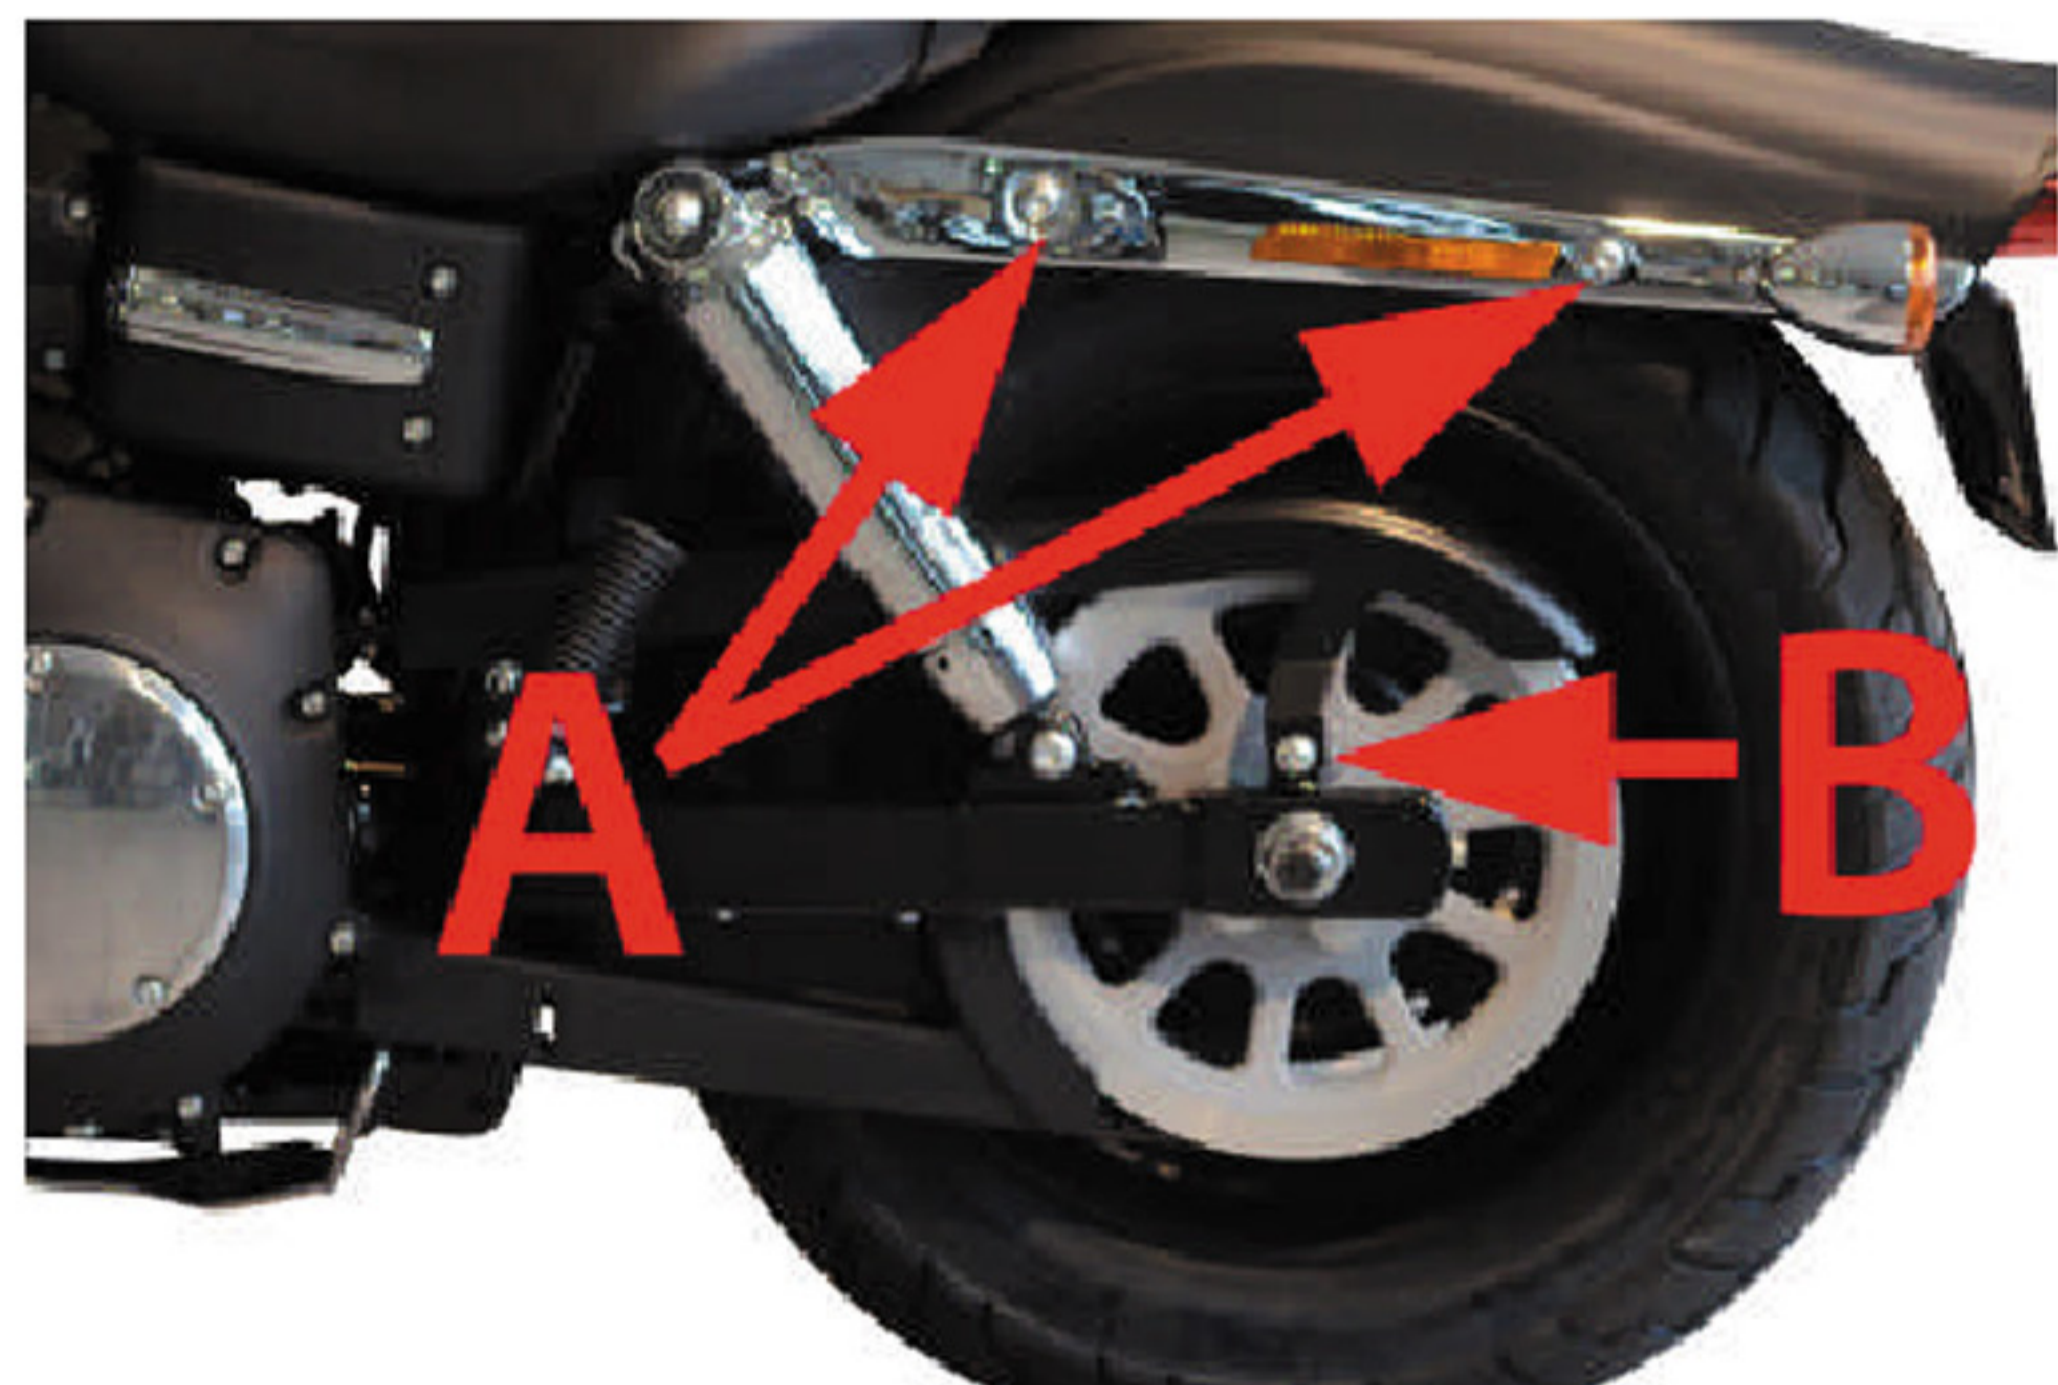

Left:

Basically it is very simple to mount our saddlebags to the fender-struts of a Harley. To do this, the upper retaining straps are wrapped around the struts and pulled tight (Points A). There's a little gap between the struts and the fender, through which the strap has to be put through. The lower strap can be placed variably. It can be mounted e.g. around the rear belt guard arm (B) or with the included stainless steel plate (check out below).



The devil is, as always, in the details: Some models have fender-strut-covers. Those are covering the gap to the fender. Here it is necessary to loosen the strut-cover and to put the included plastic washers between the cover and the struts to both retaining bolts. So the gap between cover and fender is getting bigger, which allows threading the strap easily through.

Right:

The upper straps are wrapped around the fender struts, the lower strap can be mounted to the rear guard arm. so that you do not look like Dumbo, the flying elephant, when riding with an empty bag at high speed.



The delivery includes a stainless steel bracket for the additional fixing of the bag. The bracket has to be put on to the rear axle. The lower strap can be mounted to this bracket.



Well, that looks great! Now you can load the saddlebag ad libitum. Check periodically, if the bag fits firmly. Through wetness, the leather straps will give in, in the beginning and should then be retightened. Check always that the bag does not get into contact with the pulley or break equipment.

