

Grille integration kit for LED headlights



Installation instructions for the universal grille integration kit

Included in delivery

- 2x high-performance LED headlights
- 2x universal grille mounting bracket
- 1x wiring harness

Thank you for choosing our EURALIGHT LED headlights

Before you start installing your new headlights, we ask you to read these instructions completely to avoid damage. We would like to point out that only the installation material supplied should be used. We accept no liability for damage to your vehicle during or after installation. We recommend that you have the installation and electrical connection carried out by a specialist workshop. We are happy to answer any questions you may have.

Legally compliant installation

Please find out about the national legislation on the use of additional headlights in road traffic before installation.

Care instructions

Keep the headlights clean. Dirt on the lens and the housing can shorten the life of the product. We recommend that you only clean the lens and the housing with lukewarm water.

Please make sure that you do not clean the headlights with a high-pressure cleaner. Most headlights cannot displace water from a short distance when there is high water pressure.

WARNING!

Chemical cleaning agents or alkalis should not be used to clean the headlights. Some chemicals contain a small amount of solvents that can dissolve sealing adhesives and affect the waterproofness of the headlights.

Important

The mounting brackets supplied have been adapted and developed for the headlights included in the delivery. The mounting brackets are universal and therefore a 100% fit cannot be guaranteed.

Grille integration kit for LED headlights

Required tools



Installation step 1

Before installation, mount the light bars on the brackets, placing a black rubber ring on the left and right between the light and the bracket.



Installation step 2

To install the kit, the radiator grille should be removed. You need the dimensions given below in order to install the brackets and light bar. The 6 threads must be passed through the radiator grille.



Adjustments may need to be made to the grille to ensure the brackets are securely in place.

Repeat the same on the other side with the second bracket.

Grille integration kit for LED headlights

Assembly step 3

Turn the grille over and position the brackets so that they sit horizontally in the grille. Then attach the supplied plates, the small or large ones depending on the space, to the thread, two per bracket.



Place a washer on the thread and then the nuts and tighten them with a wrench. Make sure that the bracket does not slip.



Assembly step 4

Place the cover caps on the hexagon socket screws




Installation step 5

Reinstall the grille onto the vehicle.


Grille integration kit for LED headlights

Installation step 5


Make the electrical connection according to the connection plan.

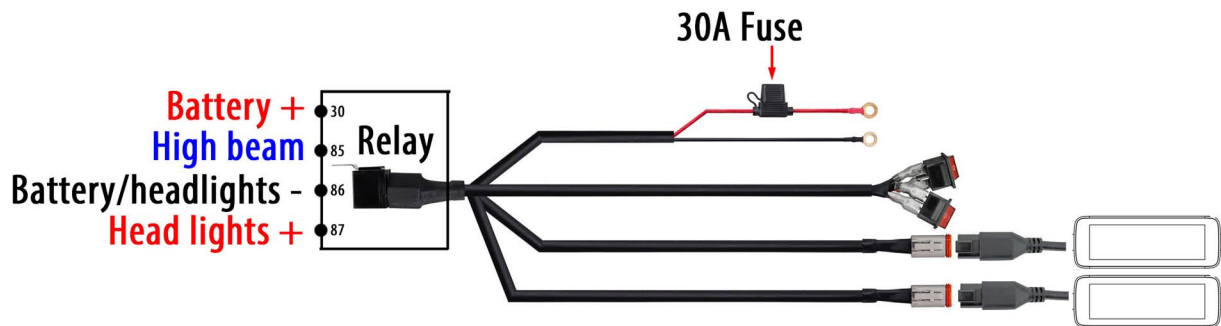

Parking light switch

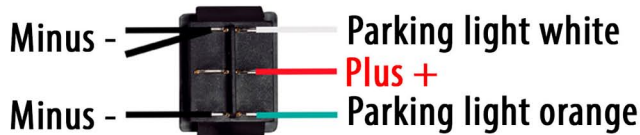

Highbeam switch

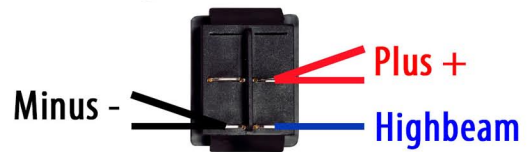

HOW TO CONTROL SUPER BRIGHT MODE:

When you first turn on the high beam, it is set to E mode (road legal). To switch to Super Bright mode, switch the high beam on for 2 seconds, then let the high beam flash twice. The integrated module will then switch to Super Bright mode (off-road only). To switch back to E mode, switch the high beam off for 5 seconds, now switch the high beam back on and let the high beam flash twice.

Enjoy your new EURALIGHT LED high beams